


HIGH BRIGHTNESS SMD3528 LED T8 Tube**APPEARANCE****TECHINIAL DATA**

Item No: HK-GT0608X-X (2ft, 8W T8 LED tube)			
Correlated Color	Warm white/Pure White/Neutral White		
Color Temperature	3000-3500k/6000-7000k/4000-4500k		
Compare to	20W fluorescent tube		
Power Consumption	8W	Voltage	85-265V AC
LED Type	SMD 3528	Luminous Flux	680lm
LED Quantity	120pcs	Power Factor	0.93-0.96
CRI	>76	LED Efficiency	85lm/W
Working Frequency	50-60Hz	Lifespan	50,000h
Item Size	600*26mm	Pin Type	T8-G13
Lens Color	Clear or frosted		
Materials	Aluminum base and PC		
Operating Temperature	-40°F to 122°F (-40°C to 50°C)		

Item No: HK-GT1215X-X (4ft,15W T8 LED tube)			
Correlated Color	Warm white/Pure White/Neutral White		
Color Temperature	3000-3500k/6000-7000k/4000-4500K		
Compare to	35-40W fluorescent tube		
Power Consumption	15W	Voltage	85-265V AC
LED Type	SMD 3528	Luminous Flux	1265lm
LED Quantity	238pcs	Power Factor	0.93-0.96
CRI	>76	LED Efficiency	85lm/W
Working Frequency	50-60Hz	Lifespan	50,000h
Item Size	1200*26mm	Pin Type	T8-G13
Lens Color	Clear or frosted		
Materials	Aluminum base and PC		
Operating Temperature	-40°F to 122°F (-40°C to 50°C)		
Item No: HK-GT1220X-X (4ft, 20W T8 LED tube)			
Correlated Color	Warm white/Pure White/Neutral White		
Color Temperature	3000-3500k/6000-7000k/4000-4500k		
Compare to	50W fluorescent tube		
Power Consumption	20W	Voltage	85-265V AC
LED Type	SMD 3528	Luminous Flux(PW)	1710lm
LED Quantity	322pcs	Power Factor	0.93-0.96
CRI	>76	LED Efficiency	85lm/W
Working Frequency	50-60Hz	Lifespan	50,000h
Item Size	1200*26mm	Pin Type	T8-G13
Lens Color	Clear or frosted		
Materials	Aluminum base and PC		
Item No: HK-GT1525X-X (5ft, 25W T8 LED tube)			
Correlated Color	Warm white/Pure White/Neutral White		
Color Temperature	3000-3500k/6000-7000k/4000-4500K		
Compare to	60W fluorescent tube		
Power Consumption	25W	Voltage	85-265V AC
LED Type	SMD 3528	Luminous Flux(PW)	2125lm
LED Quantity	360pcs	Power Factor	0.93-0.96
CRI	>76	LED Efficiency	85lm/W
Working Frequency	50-60Hz	Lifespan	50,000h
Item Size	1500*26mm	Pin Type	T8-G13
Lens Color	Clear or frosted		
Materials	Aluminum base and PC		

PACKING DETAILS

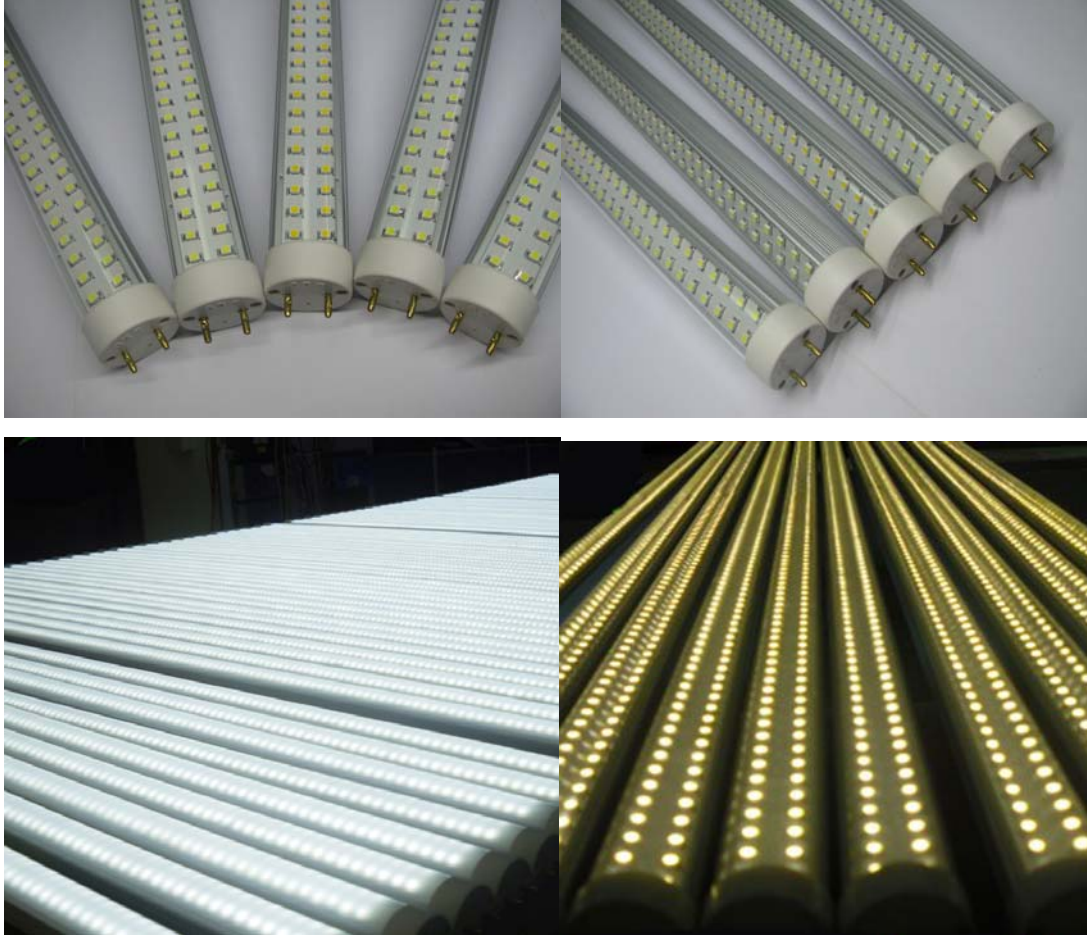

LED tube Standard Box Package

Packing Size	0.6m (2ft)	650mm*180mm*180mm, 25pcs/carton, G.W.:7.0kgs
	1.2m (4ft)	1260mm*180mm*180mm, 25pcs/carton, G.W.:13kgs
	1.5m (5ft)	1560mm*180mm*180mm, 25pcs/carton, G.W.: 18kgs

The T8 Tube Features

With Isolated Driver, more safe and stable.

With 2 years warranty

With CE, FCC Approval

Longer life than a fluorescent tube: min.50, 000hours

70%-80% Energy-saving over fluorescent tubes

No RF interference

No flickering or buzzing

No mercury and other hazardous materials, fully RoHs -compliant

PC cover: Not easily broken

Aluminum housing: Better heat dissiation&longer lifetime for the LED's